


# RIV536 Hydropneumatic tool for blind rivets with 360° rotating head

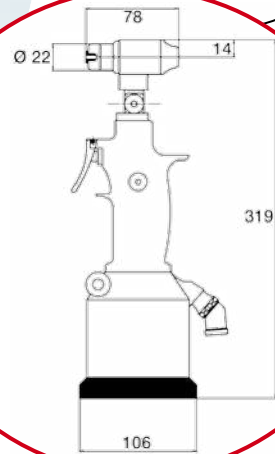

**Code 4420100**

To place all alloy blind rivets up to  $\varnothing 4.8$  with smooth rivet mandrel  $< \varnothing 2.9$  (not knurled).

RIV536 is a hydropneumatic tool for blind rivets featuring an angular head which allows installing of blind rivets in difficult-to-reach and blind-sided parts. The head can rotate 360° and can be oriented in any positions from 0° to 180°, facilitating the installation of the rivet at any angle.

RIV536 is sold in a case with  $\varnothing 2.4 - 3.0/3.2 - 3.4/4.0 - 4.8$  nosepieces.

## Fittings

Picture	Description	Pc	Code
	Nosepiece $\varnothing 2.4$ mm	1	<b>0189400</b>
	Nosepiece $\varnothing 3.0/3.2$ mm	1	<b>0176500</b>
	Nosepiece $\varnothing 3.4/4.0$ mm	1	<b>0176600</b>
	Nosepiece $\varnothing 4.8$ mm	1	<b>0176900</b>
	Clamps (3 pc)	2	<b>4260500</b>

## Technical data and features

Air working pressure	<b>6 bar</b>
Min-max air pressure	<b>5/7 bar</b>
Air consumption per cycle (6 bar)	<b>1.5 lt</b>
Stroke	<b>14 mm</b>
Max power (6 bar)	<b>8500 N</b>
Weight	<b>1.803 Kg</b>
Vibrations	<b><math>&lt; 2,5 \text{ m/s}^2</math></b>
Noise level	<b>76 dB (A)</b>

360° head rotation (horizontal) and from 0° to 180° (vertical)



Vertical application.

