

**Table saw**

**TKS 254 PRO (400 V)**

Fixed machine with heavy base and maximum cutting depth 80 mm.



**Article number** ▼

5902028

**Brand** ▼

Holzstar

**Catalog directory** ▼

Woodworking machinery » Circular saw / Sliding table saws » Table Saws

**Purchase** ▼

Minimum 1 pc(s).



**Delivery content** ▼

- Substructure
- Sliding table
- Table extension
- Rip fence
- Saw blade 254 x 30 x 3.0 mm Z40
- Saw blade guard with suction hose
- Angle stop

**Shipping informations** ▼

Packaging Metrics		Weights		Delivery		Other	
Length	1,430 mm	Gross	147 kg	Delivery	Carrier	DualUse	✘
Width	1,000 mm	Net	132 kg	Content	1 pc(s).	SCIP	n/a
Height	1,030 mm					SVHC	No

**Description** ▼

- Large cast iron table
- Stable suspension of the saw unit
- Saw blade height adjustment via handwheel from the operator front
- Equipped with a powerful motor and thermal overload protection
- Integrated extraction connection on the saw blade guard
- Table extension as standard
- Cast iron suspension of the saw unit
- The solid construction ensures particularly high stability and vibration damping
- Saw blade inclination 45° degrees to the right

### Manufacturer


Stürmer Maschinen GmbH  
Dr.-Robert-Pfleger-Str. 26, 96103 Hallstadt, Germany  
info@stuermer-maschinen.de

### Media informations





With accurate and smooth height and tilt adjustment of the saw unit through easy-to-use handwheel

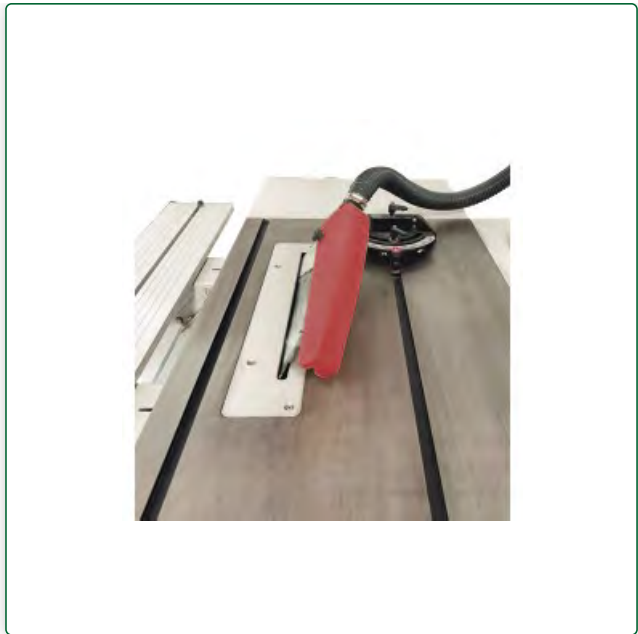

Saw blade inclination 45° degrees to the right



Parallel fence with round bar guide



High-quality angle stop included



Precise swivel segment guide

## Technical data ▼

Dimensions and weights			
Length (product) approx.	1100 mm	Width/depth (product) approx.	1090 mm
Height (product) approx.	870 mm	Net weight approx.	132 kg
Extraction port			
Extraction port diameter bottom	100 mm	Saw blade protection extraction port diameter	30 mm
Electrical Data			
Supply voltage	400 V	Mains frequency	50 Hz
Absorbed power drive motor	2,0 kW	Output power (motor power)	1,5 kW
Total output	2,1 kW	Total rated value	3,5 A
Motor speed	2800 min <sup>-1</sup>		
Sliding carriage and table			
Sliding carriage length	400 mm	Sliding carriage width	250 mm
Table length	720 mm	Table width	480 mm
Work height	830 mm		
Noise emission			
Sound pressure level	83 dB(A)		
Circular saw unit			
Max. cutting width with rip fence	610 mm	Max. cross cut width left from saw blade	550 mm
Saw blade angle	-45 90 °	Max. cutting height 90°	80 mm
Max. cutting height -45°	56 mm	(Main) saw blade diameter	254 mm
(Main) saw blade speed	4000 min <sup>-1</sup>		

## Accessories ▼



**Saw blade**  
**254 x 30 x 3 mm Z40**



**Article number** ✓  
5912026

**Availability** ✓  
In stock  
Immediate delivery

**Purchase** ✓  
Minimum 1 pc(s).

**Price informations** ✓

---

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.