

EMAX

EMAX HYDRAULIC PUMPS



torcui

**STRENGTH
UNDER PRESSURE**

EMAX

ELECTRIC HYDRAULIC TORQUE WRENCH PUMP



THREE-STAGE PERFORMANCE

GET MAXIMUM PERFORMANCE FROM A MINIMUM WEIGHT HYDRAULIC TORQUE WRENCH PUMP. SET THE PRESSURE AND ACHIEVE THE TORQUE EVERY CYCLE.

TECHNICAL DATA

EMAX-115V / EMAX-230V

Reservoir Capacity (gal/litre)
Valve Style
Motor Specification
Weight (lbs/kg)

2.2 / 8.4
Auto Retract
2.2 hp / 1.6 kW
62 / 28

MAX OIL FLOW

EMAX-115V / EMAX-230V

Stage 1 (1000psi / 70bar)
Stage 2 (3900psi / 270bar)
Stage 3 (10,000psi / 700bar)

610 cu.in/min	10.0 l/min
145 cu.in/min	2.4 l/min
65 cu.in/min	1.1 l/min



DIMENSIONS

EMAX-115V / EMAX-230V

Length (in/mm)
Width (in/mm)
Height (in/mm)



16.5 / 419
15.0 / 381
16.0 / 406

RESERVOIR DIMENSIONS


EMAX-115V / EMAX-230V

Length (in/mm)
Width (in/mm)
Height (in/mm)

12.6 / 320
9.4 / 239
5.1 / 130

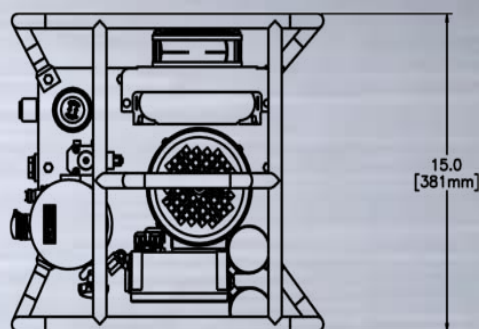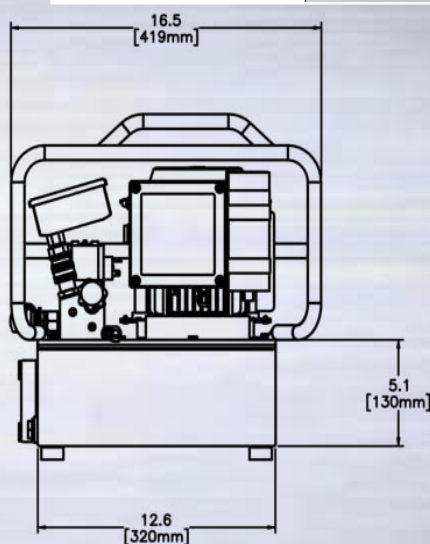

*All EMAX pumps fitted with an oil cooler

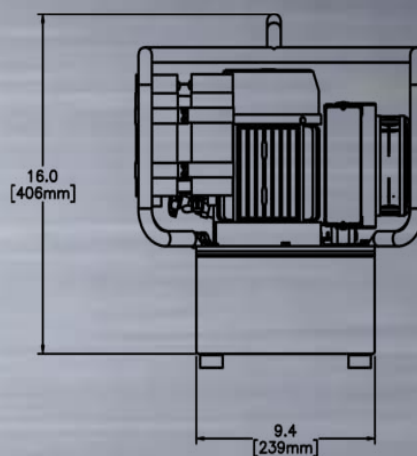

TWIN LINE
HYDRAULIC HOSE

MULTI- PORT
MANIFOLD



* HYDRAULIC HOSE AND MULTI- PORT MANIFOLD SOLD SEPARATELY
TorcUP Inc. 1025 Conroy Place Easton, PA. 18040 USA 1-888-TorcUP-1 +1 610-250-5800